

**This item is the archived peer-reviewed author-version of:**

Enhancing CO<sub>2</sub> conversion with plasma reactors in series and O<sub>2</sub> removal

**Reference:**

Vertongen Rani, Trenchev Georgi, Van Loenhout Robbe, Bogaerts Annemie.- Enhancing CO<sub>2</sub> conversion with plasma reactors in series and O<sub>2</sub> removal  
Journal of CO<sub>2</sub> utilization - ISSN 2212-9839 - 66(2022), 102252  
Full text (Publisher's DOI): <https://doi.org/10.1016/J.JCOU.2022.102252>  
To cite this reference: <https://hdl.handle.net/10067/1914670151162165141>

# Enhancing CO<sub>2</sub> conversion with plasma reactors in series and O<sub>2</sub> removal

Rani Vertongen,<sup>1</sup> Georgi Trenchev,<sup>1</sup> Robbe Van Loenhout<sup>1</sup> and Annemie Bogaerts<sup>1</sup>

<sup>1</sup> Research group PLASMANT, Department of Chemistry, University of Antwerp, Universiteitsplein 1, 2610 Antwerp, Belgium.

Corresponding authors:

M. Sc Rani Vertongen, email: rani.vertongen@uantwerpen.be

Dr. Georgi Trenchev, email: georgi.trenchev@uantwerpen.be

Prof. Dr. Annemie Bogaerts, email: annemie.bogaerts@uantwerpen.be

## Abstract

In this work, we take a crucial step towards the industrial readiness of plasma-based CO<sub>2</sub> conversion. We present a stepwise method to study plasma reactors in series as a first approach to a recycle flow. By means of this procedure, the CO<sub>2</sub> conversion is enhanced by a factor of 3, demonstrating that a single-pass plasma treatment performs far below the optimal capacity of the reactor. Furthermore, we explore the effect of O<sub>2</sub> in the mixture with our flexible procedure. Addition of O<sub>2</sub> in the mixture has a clear detrimental effect on the conversion, in agreement with other experiments in atmospheric pressure plasmas. O<sub>2</sub> removal is however highly beneficial, demonstrating a conversion per pass that is 1.6 times higher than the standard procedure. Indeed, extracting one of the products prevents recombination reactions. Based on these insights, we discuss opportunities for further improvements, especially in the field of specialised separation techniques.

## Keywords

Plasma; CO<sub>2</sub> conversion; atmospheric pressure glow discharge; oxygen removal; reactors in series; recycle flow

## Highlights

- Enhanced CO<sub>2</sub> conversion by plasma reactors in series.
- Removing O<sub>2</sub> from the mixture greatly improves the CO<sub>2</sub> conversion.
- Promising process to combine with specialised separation techniques.

# 1. Introduction

Global warming is one of today's major challenges. The largest contributor to this problem is the generation of greenhouse gases by human activity, dominated by CO<sub>2</sub>. [1] To minimize the consequences of climate change, a combined strategy is needed that cuts carbon emission and lowers the current high levels of CO<sub>2</sub> in the atmosphere. Indeed, carbon capture and utilization (CCU) is being increasingly investigated to convert CO<sub>2</sub> into value-added chemicals and fuels. [2] By transforming this waste gas into a renewable feedstock, CCU can decrease our dependence on fossil fuels, so that technology can advance according to the cradle-to-cradle principle. [3] In the context of electrification of the industry, several alternative technologies are being developed, including plasma technology. [4]

Plasma is an ionized gas, consisting of various molecules, radicals, excited species, ions and electrons. When a plasma is generated by applying an electric field, i.e. a gas breakdown, the electrons in the plasma are more efficiently heated by the applied electric power than the other species, thereby activating the gas molecules through electron impact reactions. Depending on the discharge state and parameters, a considerable amount of the energy input can be directed towards useful reactions like CO<sub>2</sub> splitting. [5] Since a plasma reactor is easily switched on/off, it has great potential to store intermittent renewable energy in chemical form. Other important advantages include the fact that it does not require scarce materials, and that it is scalable to the size of the energy market. [4]

Different types of plasma reactors have already been examined for CO<sub>2</sub> conversion. [4] Dielectric barrier discharges (DBD) have a simple design and operate at atmospheric pressure. They reach high conversion (up to 30%) but their energy efficiency is quite limited (5-10 %). [6, 7] Microwave plasmas reach much higher energy efficiencies (mostly at 50%, sometimes even 80-90%), yet typically only at reduced pressures. [8] Gliding arc reactors can overcome these disadvantages: they operate at atmospheric pressure with good energy efficiencies (around 30%). However, their conversion is restricted to 8-9% by the limited fraction of gas passing through the reactor. [9, 10]

Atmospheric pressure glow discharges (APGD) are gaining interest for fundamental studies, [11] for instance of the glow-to-arc transition, [11, 12] but also for applications like surface modification [13, 14] and gas conversion. [15, 16] They operate in a stable regime at low current (a few to a few tens of mA) and with a high voltage (a few to a few tens of kV). Trenchev *et al.* [17] investigated their performance for CO<sub>2</sub> splitting and obtained particularly promising results with a so-called confined APGD. It encapsulates the plasma zone in a high-temperature resistant ceramic material, to maximize the fraction of gas activated by the plasma. It reaches a conversion of 12.5% for an input power of 110 W (6.5 kJ/L), resulting in an energy efficiency of 26%. For an atmospheric DC plasma, these results are very promising, although further improvements are necessary to make it competitive with other emerging technologies.

There exist different strategies to enhance the performance for gas conversion. One of them is to further improve the reactor design, but this requires creative designs, modelling and extensive experiments to test the ideas. An alternative is to look at the process in general and find other solutions to well-known limitations, such as the limited residence time in the plasma or the recombination of the reaction products.

A limited residence time can be one explanation for a low gas conversion. Furthermore, non-ideal gas mixing can be a key contributing factor to the overall limited conversion. [17] Improvements to enhance the conversion include the implementation of a more confined electrode design [17] or elongation of the plasma. [18] An alternative is to install multiple reactors in series or to recycle the

output gas flow, both common approaches in process design. [19] In the core Haber-Bosch process for example, the conversion of a single pass is low (<20%), but this is increased by recycling the unconverted products back into the reactor. [20] Another example is methanol synthesis from syngas: by carefully tuning the rate of recycled unconverted gas to the fresh feed gas, almost complete carbon conversion can be achieved. [21]

Even though these concepts of reactors in series and recycle flows are omnipresent in chemical industry, it is not commonly investigated for plasma reactors. Roohollah *et al.* [22] studied plasma reactors in series for benzene removal and could enhance the 55% removal efficiency in a single cycle to complete removal in four cycles. Regarding the cost of (not) recycling gas in a process, Martorell *et al.* [23] calculated the differences for their direct current (DC) arc-jet for the deposition of diamond films. Without recycling, 63% of the break-even production cost was caused by gas consumption, compared to 21% when recycling 85% of the flow. Other examples include argon recovery, [24] detoxification of gas [25-27] or water [28] and gas conversion to value-added products. [29-31] Concerning CO<sub>2</sub> conversion specifically, Li *et al.* [32] designed an interesting plasma-sorbent system for integrated CO<sub>2</sub> capture and conversion. They tested a system of parallel reactors for continuous operation, as well as reactors in series. Although the CO concentration showed no significant difference in their test cases, the reactors in series were clearly superior to suppress the CO<sub>2</sub> concentration below 1%, demonstrating the importance of process design once more. Semiokhin *et al.* [33, 34] also studied CO<sub>2</sub> plasma in a low pressure (100-500 Torr) silent electric discharge. The degree of dissociation first increased with the duration of gas circulation and then stabilised to a constant value. Furthermore, this plateau was reached much sooner for higher power inputs, compared to the slow increase at low plasma powers. These examples illustrate the benefit of investigating gas recirculation to optimise the residence time in the plasma. Clearly, investigating reactors in series and recycle flows is an important step towards up-scaling of plasma reactors for industrialisation.

Another limitation for the overall CO<sub>2</sub> conversion is the recombination of the reaction products:



One way to prevent this reaction is by quickly cooling the gas, to quench the converted reaction products, though this is difficult to facilitate in reality. [35] Another strategy is to remove one of the reaction products of CO<sub>2</sub> splitting. Oxygen for example can be extracted by means of membrane technology [36] or an oxygen scavenger. [37-39] The contrary is studied as well: one can explore the reactivity of O atoms in the plasma and induce the reverse of reaction R1. Additional conversion is possible through reaction of vibrationally excited CO<sub>2</sub> molecules with these O atoms, as demonstrated by previous modelling [40] and experimental [41] studies. Hence, in combination with the recycling flow described above, the O<sub>2</sub> and O atom concentrations might be key to enhance the conversion.

In this work, we present a stepwise method to study APGD plasma reactors in series for CO<sub>2</sub> conversion as a first approach to a recycle flow. Furthermore, we apply varying oxygen concentrations in this method to explore the effect of oxygen removal on one hand, and oxygen addition on the other hand, related to the above reaction R1. To the best of our knowledge, this is the first work that reports such a straightforward procedure for plasma reactors to study the combined effect of a recycle flow and controlled O<sub>2</sub> concentrations that can be applied to any existing plasma reactor for CO<sub>2</sub> conversion.

The paper is structured as follows. First, we describe the general experimental set-up and method in section 2, including the procedure for varying the oxygen concentrations. The performance of the normal procedure is demonstrated in section 3, which is then compared to the oxygen removal and addition methods in section 4. A discussion about expanding these results to a conceptual industrial recirculation process follows in section 5. Finally, the overall conclusion is presented in section 6.

## 2. Methods

### 2.1 Experimental setup

The experimental setup is shown in figure 1. A cathode pin and an anode plate form the basis of the confined APGD reactor, both in stainless steel (Therma 310S). A Macor® tube completely surrounds the discharge region and cathode. The latter has a groove of  $\pm 1$  mm deep to allow the gas to enter the discharge zone and ensure an effective cooling of the cathode. At the end of the ceramic tube, the gas exits through the 5 mm opening in the anode plate, which is placed at 16 mm from the cathode tip. Trenchev *et al.* [17] described the behaviour of this plasma reactor in more detailed experiments and a computer model. They observed that the electron temperature is much higher than the gas temperature (i.e. 1.9 eV or 20 000 K compared to 2500 K) which indicates that the plasma is in thermal non-equilibrium.

A mass flow controller (Bronkhorst EI-Flow Select) was used to insert CO<sub>2</sub> into the reactor, with a purity of 99.5% and without preheating the gas. The input flow rate was 1 L<sub>n</sub> min<sup>-1</sup>. Two more mass flow controllers (Bronkhorst EI-Flow Select) were used for CO and O<sub>2</sub> to reproduce the output mixture. The plasma is ignited by a high voltage Technix DC power supply (maximum 30 kV and 40 mA). A 300 k $\Omega$  ballast resistor maintains the plasma in a glow regime. The initial start-up voltage is pre-set to 30 kV, then drops to  $\pm 10$  kV once the plasma is ignited, which is the voltage over the plasma and the resistor. This value and the set current of 25 mA can be read directly from the power supply. After the reactor, the outlet gas flows to an Agilent Micro gas chromatograph ( $\mu$ GC) for analysis.

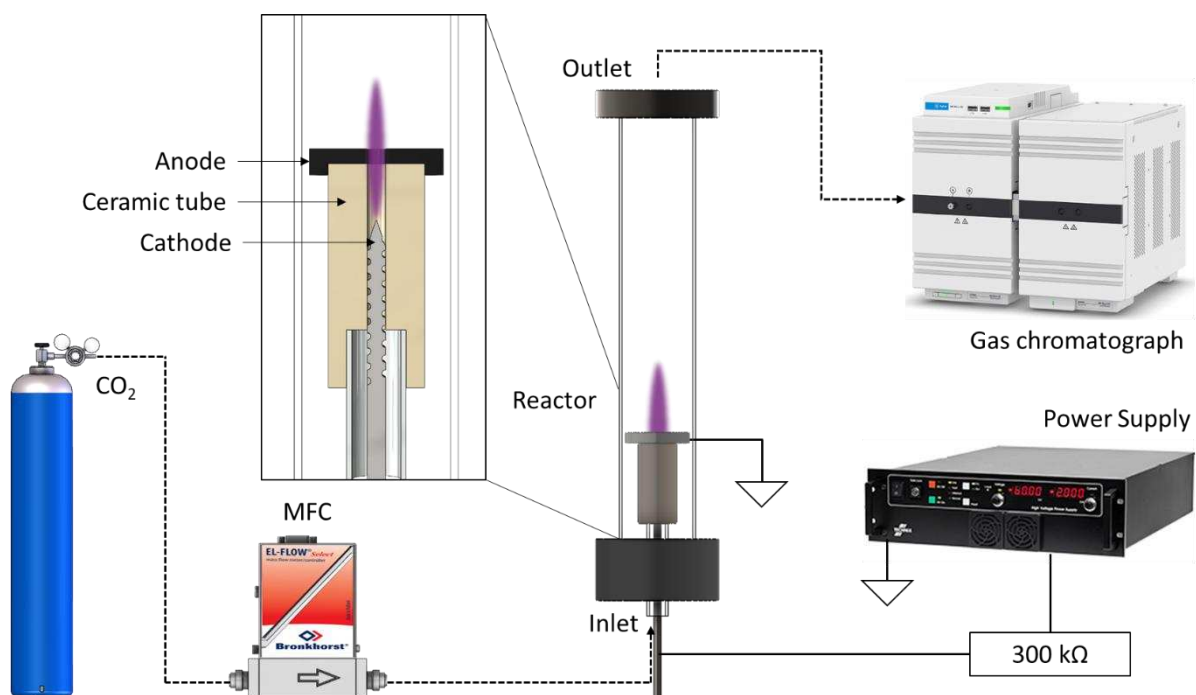


Figure 1 Schematic overview of the experimental set-up indicating the gas circuit (dashed lines) controlled by the mass flow controller (MFC) and the electrical circuit (full lines). The inset represents the inside of the reactor.

## 2.2 Gas analysis

When using the  $\mu$ GC, the following formula is used to calculate the fraction of reaction products:

$$y_{\text{products}} = \frac{A_{\text{CO}_2(\text{initial})} - A_{\text{CO}_2(\text{out})}}{A_{\text{CO}_2(\text{initial})}} \quad (\text{F1})$$

where  $A_{\text{CO}_2(\text{initial})}$  and  $A_{\text{CO}_2(\text{out})}$  are the initial and output areas of the  $\text{CO}_2$  peak in the chromatogram. The initial  $\text{CO}_2$  chromatogram is taken after the pure  $\text{CO}_2$  gas passes through the reactor without plasma. The conversion is then calculated using the following formula (see derivation in Supporting Information (SI), section S1) [42, 43]:

$$\chi_{\text{CO}_2} [\%] = \frac{2 y_{\text{products}}}{3 - y_{\text{products}}} \cdot 100\% \quad (\text{F2})$$

The specific energy input, an important parameter to determine the energy efficiency, is defined as:

$$\text{SEI} [\text{kJ L}^{-1}] = \frac{\text{Plasma power} [\text{kW}]}{\text{Flow rate} [\text{L}_n \text{ min}^{-1}]} \cdot 60 [\text{s min}^{-1}] \quad (\text{F3})$$

With the flow rate expressed in  $\text{L}_n \text{ min}^{-1}$  (liters normal per minute) with reference conditions at  $20^\circ\text{C}$  and 1 atm. The energy efficiency is defined as:

$$\eta [\%] = \frac{\chi_{\text{CO}_2} [\%] \cdot \Delta H_{\text{R}}^\circ [\text{kJ mol}^{-1}]}{\text{SEI} [\text{kJ L}^{-1}] \cdot 24.1 \text{ L mol}^{-1}} \quad (\text{F4})$$

Where  $\Delta H_{\text{R}}^\circ$  is the reaction enthalpy for  $\text{CO}_2$  splitting at standard conditions (i.e.  $283 \text{ kJ mol}^{-1}$ ) and  $24.1 \text{ L mol}^{-1}$  is the molar volume defined at the same reference conditions of the flow rate ( $20^\circ\text{C}$  and 1 atm).

Every experiment was performed three times, in order to apply a propagation of uncertainty to the results and calculate the error bars.

## 2.3 Procedure for reactors in series

We designed a stepwise method to study plasma reactors in series as a first approach to a recycle flow. The process is emulated in separate stages as represented in figure 2.

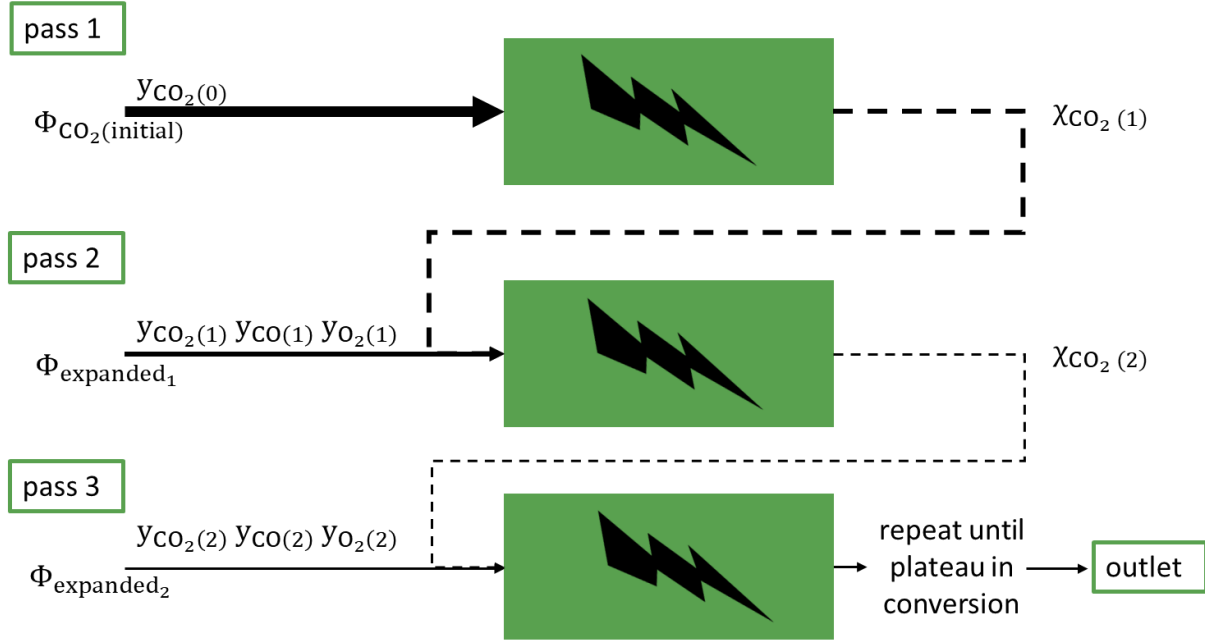


Figure 2 Schematic overview of the recirculation procedure. The first pass is a pure CO<sub>2</sub> plasma. The conversion  $\chi$  and molar fractions  $y$  are determined in the mixture after the plasma to determine the concentrations in the next input mixture. The dotted lines represent the process that we replicate, while the full lines display the real input mixtures.

During the first pass, pure CO<sub>2</sub> gas flows through the plasma reactor. Inside the reactor, this CO<sub>2</sub> is partially converted into CO and O<sub>2</sub>, which results in a lower CO<sub>2</sub> molar fraction  $y_{CO_2(1)}$  after this first pass. From this, the conversion during the first pass ( $\chi_1$ ) can be determined with formula F2. Theoretically, it is known that the O<sub>2</sub> component is equal to the gas expansion. Hence, the expanded flow rate can be determined with this fraction (see derivation in SI, section S2):

$$\Phi_{\text{expanded}}[\text{L}_n \text{ min}^{-1}] = \Phi_{CO_2(\text{initial})}[\text{L}_n \text{ min}^{-1}] + y_{O_2} \cdot \Phi_{CO_2(\text{initial})}[\text{L}_n \text{ min}^{-1}] \quad (\text{F6})$$

With  $\Phi_{\text{expanded}}$  the expanded flow rate in  $\text{L}_n \text{ min}^{-1}$  (litres normal per minute, at reference conditions 20°C and 1 atm),  $\Phi_{CO_2(\text{initial})}$  the initial flow rate ( $1 \text{ L}_n \text{ min}^{-1}$ ) and  $y_{O_2}$  the O<sub>2</sub> fraction. Using this knowledge, the output mixture from pass 1 can be replicated as the input for pass 2 with the measured molar fractions:

$$\Phi_{CO_2(2)}[\text{L}_n \text{ min}^{-1}] = y_{CO_2(1)} \cdot \Phi_{\text{expanded}}[\text{L}_n \text{ min}^{-1}] \quad (\text{F7})$$

$$\Phi_{CO(2)}[\text{L}_n \text{ min}^{-1}] = y_{CO(1)} \cdot \Phi_{\text{expanded}}[\text{L}_n \text{ min}^{-1}] \quad (\text{F8})$$

$$\Phi_{O_2(2)}[\text{L}_n \text{ min}^{-1}] = y_{O_2(1)} \cdot \Phi_{\text{expanded}}[\text{L}_n \text{ min}^{-1}] \quad (\text{F9})$$

With  $\Phi_{i(j)}$  the flow rate in  $\text{L}_n \text{ min}^{-1}$  and  $y_{i(j)}$  the molar fraction for each gas  $i$  after  $j$  passes through the reactor. We mix the gases with three mass flow controllers connected to their respective gas



bottles, i.e. CO<sub>2</sub>, CO and O<sub>2</sub>, to replicate the exact output mixture (both the total flow rate and the ratio of its components). This forms the input mixture that we send to the plasma reactor for the next pass. The concentrations of this input mixture are measured without plasma ignition, to validate the above calculation. After the second plasma, this results in an even lower CO<sub>2</sub> fraction  $y_{\text{CO}_2(2)}$  and a higher overall conversion  $\chi_2$  when compared to the initial blanc measurement of pure CO<sub>2</sub>. The total product fraction is calculated with the area of the CO<sub>2</sub> peak after pass  $j$  through the reactor:

$$y_{\text{products,total}} = \frac{A_{\text{CO}_2(\text{initial})} - A_{\text{CO}_2(j)}}{A_{\text{CO}_2(\text{initial})}} \quad (\text{F10})$$

$$\chi_{\text{CO}_2 \text{ total}} [\%] = \frac{2 y_{\text{products total}}}{3 - y_{\text{products total}}} \cdot 100\% \quad (\text{F11})$$

Note that (F10-F11) are very similar to (F1-F2) above, but apply now to the total product fraction and total CO<sub>2</sub> conversion. This procedure is repeated until the conversion stabilises. It practically simulates a system of identical plasma reactors in series, but can ultimately provide insight in the different stages of recirculation.

The specific energy input of the overall process is calculated similar to (F3) above, but the plasma power is multiplied with the number of passes  $j$  through the reactor. Next, the initial flow rate is used in this calculation, since these reactors in series treat the same initial gas volume:

$$\text{SEI}_{\text{total}} [\text{kJ L}^{-1}] = \frac{j \cdot \text{Plasma power} [\text{kW}]}{\Phi_{\text{initial}} [\text{L}_n \text{ min}^{-1}]} \cdot 60 [\text{s min}^{-1}] \quad (\text{F12})$$

The total energy efficiency is then calculated as follows:

$$\eta_{\text{total}} [\%] = \frac{\chi_{\text{CO}_2 \text{ total}} [\%] \cdot \Delta H_{\text{R}}^{\circ} [\text{kJ mol}^{-1}]}{\text{SEI}_{\text{total}} [\text{kJ L}^{-1}] \cdot 24.1 \text{ L mol}^{-1}} \quad (\text{F13})$$

Where  $\Delta H_{\text{R}}^{\circ}$  and the molar volume are equal to the conditions in (F4).

## 2.4 Removal and addition of O<sub>2</sub>

The above procedure is very flexible since we replicate the output of each plasma treatment by mixing CO<sub>2</sub>, CO and O<sub>2</sub> from their respective gas bottles. This allows us to control the flow rates of each component and even adjust it, for example to study the effect of O<sub>2</sub> in the mixture. It should be noted that we assume ideal conditions for the calculation of the flow rates, but the detection of the output concentrations remains valid since the method of the  $\mu$ GC is independent of the flow rate.

In a second series of experiments, we mimic the procedure as if an oxygen scavenger would be present between each pass. The oxygen is arbitrarily removed by manipulating the input mixture, which implies that the gas flow rate stays equal to the initial flow rate since the expanded volume is removed. Then, the measured ratio of CO<sub>2</sub> and CO is maintained, so that the new input flow rates are calculated as follows:

$$\Phi_{\text{CO}_2(j)}[\text{L}_n \text{ min}^{-1}] = \frac{y_{\text{CO}_2(j-1)}}{y_{\text{CO}_2(j-1)} + y_{\text{CO}(j-1)}} \cdot \Phi_{\text{CO}_2(\text{initial})}[\text{L}_n \text{ min}^{-1}] \quad (\text{F14})$$

$$\Phi_{\text{CO}(j)}[\text{L}_n \text{ min}^{-1}] = \frac{y_{\text{CO}(j-1)}}{y_{\text{CO}_2(j-1)} + y_{\text{CO}(j-1)}} \cdot \Phi_{\text{CO}_2(\text{initial})}[\text{L}_n \text{ min}^{-1}] \quad (\text{F15})$$

With  $y_{i(j-1)}$  the measured output fractions for each gas  $i$  from the previous pass ( $j - 1$ ) through the reactor.

Finally, in the third series, we mimic the opposite from oxygen removal: after each pass, the O<sub>2</sub> concentration is doubled. The expanded flow rate is then calculated as follows:

$$\Phi_{\text{expanded}}[\text{L}_n \text{ min}^{-1}] = \Phi_{\text{CO}_2(\text{initial})}[\text{L}_n \text{ min}^{-1}] + 2 \cdot y_{\text{O}_2} \cdot \Phi_{\text{CO}_2(\text{initial})}[\text{L}_n \text{ min}^{-1}] \quad (\text{F16})$$

The new input flow rates are then calculated with twice the oxygen concentration:

$$\Phi_{\text{CO}_2(j)}[\text{L}_n \text{ min}^{-1}] = \frac{y_{\text{CO}_2(j-1)}}{y_{\text{CO}_2(j-1)} + y_{\text{CO}(j-1)} + 2 \cdot y_{\text{O}_2(j-1)}} \cdot \Phi_{\text{expanded}}[\text{L}_n \text{ min}^{-1}] \quad (\text{F17})$$

$$\Phi_{\text{CO}(j)}[\text{L}_n \text{ min}^{-1}] = \frac{y_{\text{CO}(j-1)}}{y_{\text{CO}_2(j-1)} + y_{\text{CO}(j-1)} + 2 \cdot y_{\text{O}_2(j-1)}} \cdot \Phi_{\text{expanded}}[\text{L}_n \text{ min}^{-1}] \quad (\text{F18})$$

$$\Phi_{\text{O}_2(j)}[\text{L}_n \text{ min}^{-1}] = \frac{2 \cdot y_{\text{O}_2(j-1)}}{y_{\text{CO}_2(j-1)} + y_{\text{CO}(j-1)} + 2 \cdot y_{\text{O}_2(j-1)}} \cdot \Phi_{\text{expanded}}[\text{L}_n \text{ min}^{-1}] \quad (\text{F19})$$

With  $y_{i(j-1)}$  the measured output fractions for each gas  $i$  from the previous pass ( $j - 1$ ) through the reactor.

### 3 Performance of the APGD in series: CO<sub>2</sub> conversion and energy efficiency

We measured the CO<sub>2</sub> conversion and energy efficiency for a fixed initial flow rate of 1 Ln/min and a fixed input current of 25 mA, and the resulting power is in the range of 60-70 W. This power is lower than in the previous experiments of the APGD, [17] since we chose a shorter cathode-anode distance to ensure easy ignition. However, it was not the goal of this study to present the best results of this reactor, rather to demonstrate the principle of recirculation in a step-by-step procedure. The concentrations in the mixture after the plasma reactor are determined and then used as input for the next pass through the reactor.

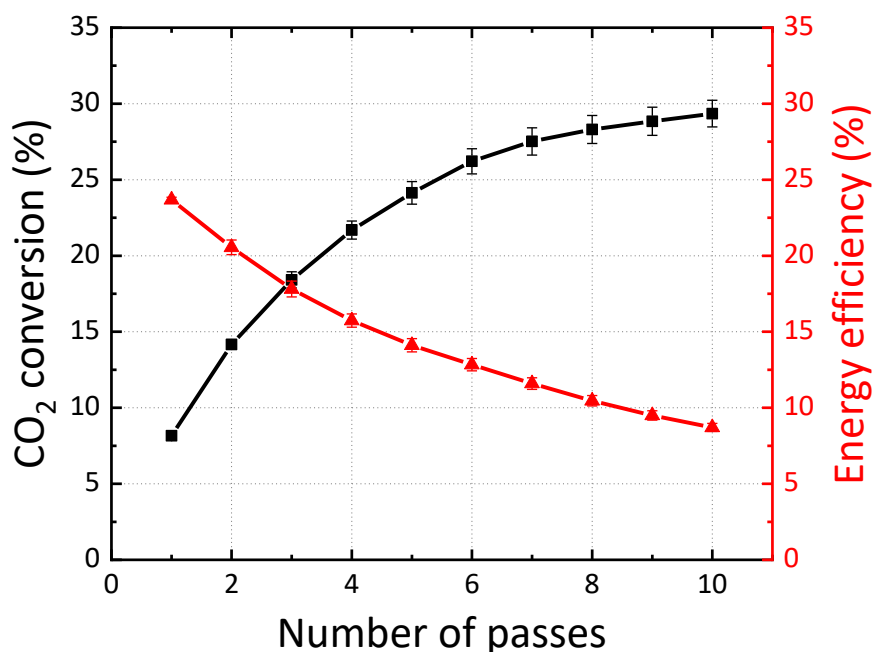


Figure 3 Evolution of the CO<sub>2</sub> conversion (left axis) and energy efficiency (right axis) for increasing number of passes through the reactor. The error bars indicate the deviation of the actual input concentration of CO<sub>2</sub> to the measured input CO<sub>2</sub> concentration, propagated to the energy efficiency. Some error bars are too small to be visible.

Figure 3 summarises the performance of the simulated reactors in series. The CO<sub>2</sub> conversion clearly rises from  $8.16 \pm 0.06\%$  in the first pass to a threefold higher conversion of  $24.1 \pm 0.7\%$  in the fifth pass. The steep increase slows down to a plateau around eight passes, and to  $29.3 \pm 0.9\%$  in pass ten, which is 3.6 times the conversion of a single plasma treatment. The plateau in the CO<sub>2</sub> conversion indicates an equilibrium between splitting and recombination reactions, as discussed further in this work.

The energy efficiency drops simultaneously, since the same power is applied for a smaller additional conversion per pass. It is  $23.7 \pm 0.2\%$  for one pass, lowers to  $14.1 \pm 0.4\%$  in pass five, and further to  $8.7 \pm 0.3\%$  in pass ten. The trade-off between the conversion and the energy efficiency is clear. The first few passes are characterised by a rise in conversion with a limited drop in efficiency, e.g. in pass three the conversion is  $18.4 \pm 0.5\%$  with an efficiency of  $17.8 \pm 0.5\%$ . The decline in the energy efficiency is more significant when the conversion starts to saturate, since the same power is applied for a smaller additional conversion per pass. Yet, the lower efficiency might be justified in certain processes. We observe a higher CO<sub>2</sub> conversion, which increases the CO concentration and thus the

value of the output stream, thereby reducing the cost of the subsequent product separation. These type of experiments are very useful to design a process and balance these two performance parameters, as discussed in more detail in section 5.

The rise in conversion demonstrates that this plasma reactor performs far from its maximum capacity when applying a single plasma treatment. It is possible to apply this method to reactors with a higher conversion for a single plasma treatment, such as a DBD reactor. [6, 44] When starting from e.g. 15 % conversion, one might expect that the conversion saturates in less passes through the reactor. As indicated in the introduction [22-34], a variety of plasma reactors could benefit from reactors in series or a recycle flow, as well as a variety of gas mixtures including CO<sub>2</sub> with e.g. methane, hydrogen or nitrogen. Of course, the discharge characteristics for each reactor and gas mixture are different. Specific experiments are required to reveal possible improvements.

Reactors in series can increase the residence time in the plasma and one could expect an improvement similar to our results when elongating the discharge. However, only increasing the residence time might be insufficient if the same power is applied. Trenchev *et al.* [17] developed a model for the APGD studied in our work, which indicates that the chemical equilibrium is reached within 3 mm of the cathode tip along the axial coordinate ( $r = 0$ ). The mixture maintains the same concentrations of species for the rest of the discharge length. Hence, simply increasing the plasma length would not improve the conversion. An alternative is to increase the plasma power, but this introduces two problems. First, atmospheric glow discharges are sustained at low currents to maintain a non-equilibrium and enhance the vibrational-induced dissociation pathway. When increasing this current, the plasma would reach thermal equilibrium and the conversion would become less efficient. [4] Second, higher powers might be difficult to realise in a certain setup. In our case, we chose a slightly shorter cathode-anode distance (to guarantee easy plasma ignition), which means our plasma volume was somewhat smaller than in [17]. The plasma was unstable when we increased the current, so we were limited in the input power. Reactors in series provide a solution for both of these issues. First, this method allows us to increase the energy input in the gas even when the power input in a single reactor is limited and second, it ensures the non-equilibrium, resulting in a higher overall conversion.

Our basic process is a general strategy to demonstrate the enhanced performance in existing reactors, which is exactly why these concepts are so widely applied in industry.

## 4 Oxygen removal and addition

### 4.1 Performance per pass

Instead of replicating the exact output mixture, we can also adapt the method to manipulate the O<sub>2</sub> concentration of the gas mixture inserted in the reactor. In this basic system, it is interesting to study the impact of either more or less O<sub>2</sub> in the mixture without the complications of implementing real oxygen scavengers. We measured the CO<sub>2</sub> conversion per pass and energy efficiency for a fixed initial flow rate of 1 Ln/min and a fixed input current of 25 mA, and the resulting power is in the range of 60-70 W.

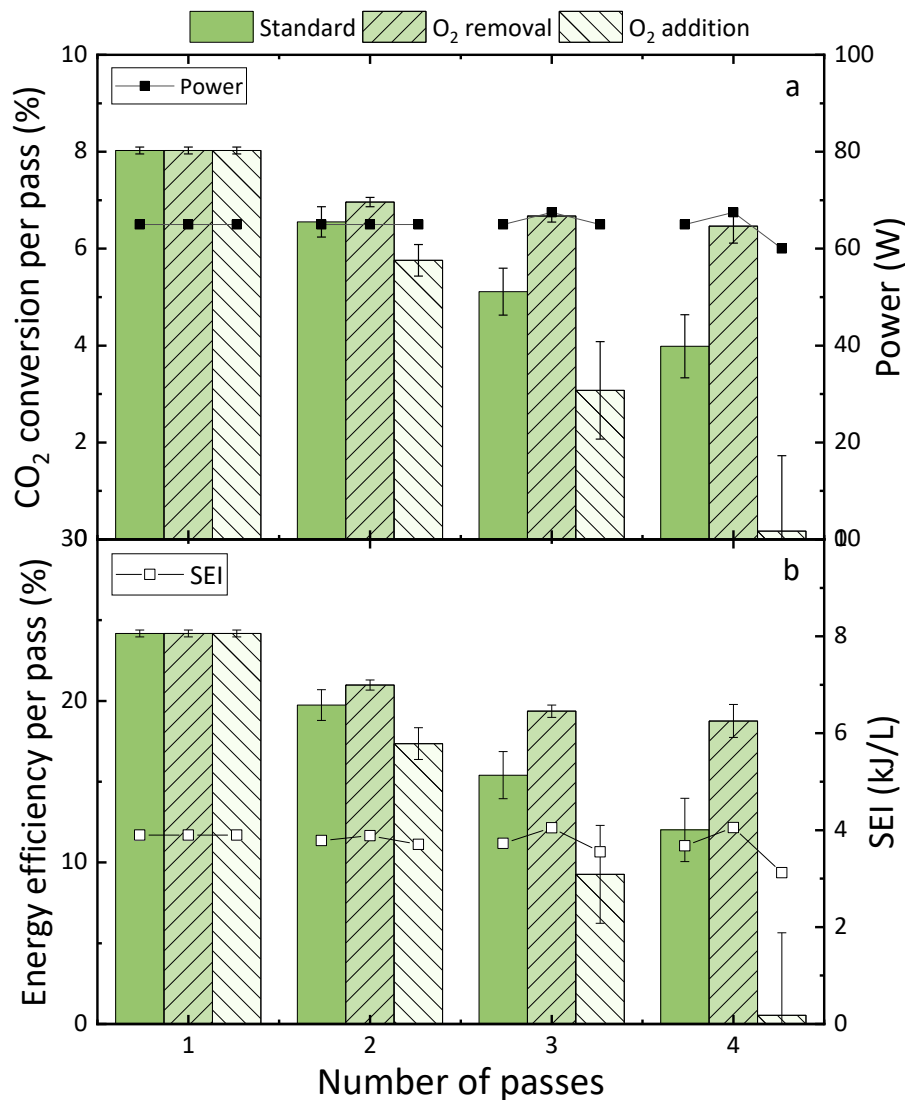


Figure 4 CO<sub>2</sub> conversion (a) and energy efficiency (b) per pass for the standard, O<sub>2</sub> removal and O<sub>2</sub> addition methods for four passes in total. The power (a) and SEI (b) for the different procedures are plotted as well, with the corresponding values indicated on the right y-axis. The error bars are quantified from the accuracy of the instrument and deviation between the theoretical and actual input CO<sub>2</sub> concentration for each new pass, propagated to the energy efficiency. In pass 1, the results of a pure CO<sub>2</sub> plasma are the same for all three methods.

There is a significant difference between the three methods, as shown in figure 4. The first pass through the reactor is a pure CO<sub>2</sub> plasma with a conversion of  $8.02 \pm 0.07\%$ , which is the same for all three methods. This is slightly lower than the result from section 3, since we operated at slightly

lower powers (65 instead of 70 W). In the second pass, the differences start to appear and only become more obvious for a larger number of passes. The CO<sub>2</sub> conversion per pass of the standard method decreases to  $3.99 \pm 0.65 \%$  in pass four. When O<sub>2</sub> is removed between the passes, the conversion per pass is higher and remains  $6.47 \pm 0.35 \%$  in pass four, which is 1.6 times the conversion of the standard method. The opposite is true when adding extra O<sub>2</sub> in the mixture: the conversion per pass drops quickly to virtually zero ( $0.17 \pm 1.56 \%$ ) in the fourth pass. For lower CO<sub>2</sub> concentrations (e.g. at higher conversions or when adding more O<sub>2</sub>), the errors become larger on the CO<sub>2</sub> conversion and consequently on the energy efficiency as well. This might be related to the accuracy of the mass flow controllers, which were less suitable for lower CO<sub>2</sub> flow rates.

The energy efficiency shows similar trends. The first pass demonstrates an efficiency of  $24.2 \pm 0.2 \%$  that drops to  $12.0 \pm 2.0 \%$ ,  $18.7 \pm 1.0 \%$  and  $0.54 \pm 5.10 \%$  in the fourth pass for the standard, O<sub>2</sub> removal and O<sub>2</sub> addition methods, respectively. It should be noted that these results disregard the energy cost related to removing or adding the oxygen in the mixture. In these experiments, there is no cost since we mix the components from the gas bottles in the lab. In a real process, such costs should be taken into account.

The O<sub>2</sub> removal clearly performs the best of the three methods. The conversion per pass stays nearly constant at ca. 6.5% in this case, resulting in a much better energy efficiency per pass (nearly 20%) than the other two methods and clearly outperforming the single pass result (an efficiency of 24% for only 8% conversion). Note that the efficiency shows the same overall trends as the conversion, since the SEI does not vary much between the methods. The physical conditions are indeed quite constant and only differ somewhat in the fourth pass, as shown in table 1. First, the flow accelerates and due to the chosen procedure, the O<sub>2</sub> addition method inherently leads to more expansion. Second, there is a small difference in power between the three procedures (7.5 W or 11% of the total). The same input current of 25 mA was maintained, but a slight change in the voltage was observed. This voltage drop across the plasma was calculated by subtracting the voltage drop over the resistor from the total voltage drop:

$$V_{plasma} = \frac{P_{total} - P_{resistor}}{I_{total}} = \frac{V_{total} \cdot I_{total} - R \cdot I_{total}^2}{I_{total}} \quad (F20)$$

With  $V_i$  the voltage (in V),  $P_i$  the power (in W),  $I_i$  the current (in A) and  $R$  the resistance (in Ohm) for the total circuit, plasma and resistor. For O<sub>2</sub> removal, the voltage drop increased slightly, indicating that the plasma becomes more resistive. For O<sub>2</sub> addition, the voltage drop decreased, showing that the plasma is slightly more conductive. Overall, this does not lead to a large change in power (which is at maximum only 7.5 W different between the three methods, as mentioned above; see Table 1). Third, the temperature in the discharge might be influenced by the changing O<sub>2</sub> concentration. Due to the confinement around the plasma, we could only measure the temperature in the reactor surrounding the plasma. Although these temperatures are not representative for the temperature inside the plasma, which is much higher, at least the temperatures in the reactor can give us an indication of possible variations between the three different methods, i.e. the standard method, O<sub>2</sub> addition and O<sub>2</sub> removal. They allow us to verify whether the latter would also affect the different results. We found that these temperatures are comparable for all three methods, as discussed in the SI (section S3). To conclude, we observe that the physical characteristics remain similar, while the change in O<sub>2</sub> concentration does affect the conversion greatly. Therefore, we believe that the chemistry plays a significant role, as will be discussed in the next section.

Table 1 Overview of the input conditions in pass 4 for each method

pass 4	Flow rate (Ln/min)	$I_{total}$ (mA)	$V_{plasma}$ (kV)	$P_{plasma}$ (W)
Standard	1.073	25	-2.6	65
O <sub>2</sub> removal	0.998	25	-2.7	67.5
O <sub>2</sub> addition	1.198	25	-2.4	60

## 4.2 Cumulative performance

The total conversion cannot be determined with formula F12, since the CO<sub>2</sub> concentration is manipulated artificially in the O<sub>2</sub> procedures. An alternative is to take the sum of the conversions in each pass and evaluate this cumulative conversion, as shown in figure 5. For the energy efficiency, it is not straightforward to take the cumulative value, since the flow rate in the SEI value is manipulated artificially as well. Instead, we will compare the energy cost in this section.

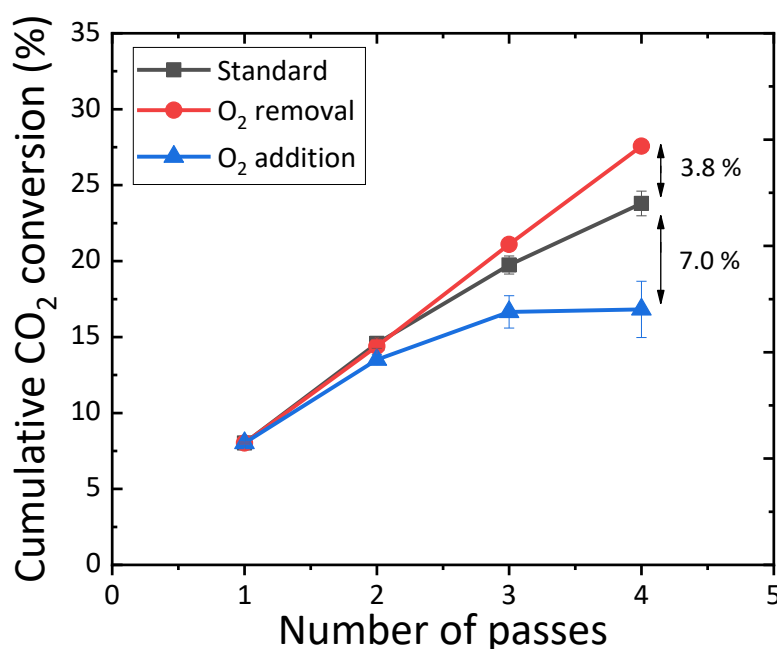


Figure 5 The cumulative CO<sub>2</sub> conversion of the standard, O<sub>2</sub> removal and O<sub>2</sub> addition methods for 4 passes in total. The difference in the final pass is indicated with arrows.

This comparison in figure 5 further highlights the significant difference in performance between the three methods. O<sub>2</sub> removal upon recirculation reaches the highest cumulative CO<sub>2</sub> conversion of 27.6 ± 0.4 % after four passes, followed by the standard method with a cumulative conversion of 23.8 ± 0.8 % and a substantially lower 16.8 ± 1.9 % cumulative CO<sub>2</sub> conversion for the O<sub>2</sub> addition method. All three procedures clearly surpass the single pass result of 8.02%. When removing O<sub>2</sub>, the cumulative conversion is even more than 3 times higher than for the single pass.

Considering the power input and conversion rate for each pass, we can calculate the energy cost for this conversion, as explained in the SI (section S4) and summarised in table 2. Obviously, because of the lower power applied, the single pass method has the lowest energy cost (7 379 kWh/ton), although this is obtained for a significantly lower CO<sub>2</sub> conversion. The O<sub>2</sub> removal method, in spite of the much higher total power applied, requires 8761 kWh/ton, hence just 1 400 kWh/ton more. Indeed, the conversion is more than three times higher than in the single pass reactor for only a

slightly higher energy cost, demonstrating the great potential of this method. Again, we should make a balance between CO<sub>2</sub> conversion and energy requirements, but it looks like gas recycling with O<sub>2</sub> removal leads overall to a better performance. A comparison with other technologies for CO<sub>2</sub> conversion is made in the SI (section S3). Please note that these results disregard the energy cost related to removing or adding oxygen in the mixture.

Table 2 Cumulative conversion and energy cost for the single pass and four passes, for the standard method, O<sub>2</sub> removal and O<sub>2</sub> addition method

Recycling stages	1 pass	4 passes		
Gas mixture	Standard	O <sub>2</sub> removal	Standard	O <sub>2</sub> addition
Cumulative conversion (%)	8.02	27.6	23.8	16.8
Total power (W)	65	265	260	255
Energy cost (kWh/ton)	7 379	8 761	9 383	12 056

These results demonstrate that O<sub>2</sub> has a clear detrimental effect on the CO<sub>2</sub> conversion. Due to the addition of a reaction product, the chemical balance shifts towards the synthesis of CO<sub>2</sub> instead of the dissociation and favours recombination reactions. This observation is in agreement with previous results of CO<sub>2</sub> plasmas at atmospheric pressure. Zhang *et al.* [45] observed a drop in conversion from 16.1 to 11% upon adding 20% or more O<sub>2</sub> in a packed bed DBD reactor. Indeed, while our O<sub>2</sub> concentration is as high as 34% in the fourth input mixture in case of the O<sub>2</sub> addition method, it is much lower in the standard method (9.5%) and virtually zero (0.007%) in the O<sub>2</sub> removal method. In another packed bed reactor, Navascues *et al.* [46] obtained a similar effect at lower O<sub>2</sub> concentrations. Their CO<sub>2</sub> conversion decreased from 13 to 8.5 % when adding only 10% O<sub>2</sub>. Uytdenhouten *et al.* [47] even ignited a mixture of 2/3 CO and 1/3 O<sub>2</sub> in a packed bed DBD, and found that this composition reached the same equilibrium as a pure CO<sub>2</sub> plasma, thereby proving the importance of this recombination reaction. These observations are not limited to atmospheric pressure plasmas only, Morillo-Candas *et al.* [48] studied CO<sub>2</sub>-O<sub>2</sub> and CO-O<sub>2</sub> gas mixtures in a pulsed radio-frequency discharge. Their results also demonstrated a key role for O<sub>2</sub> in the recombination, more specifically in reaction with the excited state of CO. An enhanced CO<sub>2</sub> dissociation would be possible through the reverse of reaction R1, but for this, O atoms are needed, and thus the O<sub>2</sub> molecules would first need to undergo dissociation. This is apparently not the case in our conditions, and the O<sub>2</sub> molecules seem to contribute primarily to the recombination reaction with CO, leading to more CO<sub>2</sub>.

Multiple studies investigated this balance on a more fundamental level: enhanced CO<sub>2</sub> conversion by the O-CO<sub>2</sub> association on one hand, and its competition with the CO and O<sub>2</sub> recombination on the other hand. When the enhanced CO<sub>2</sub> conversion upon reaction with O atoms happens in the afterglow, this mechanism is called super-ideal quenching, as investigated by Vermeiren *et al.*[35] Van de Steeg *et al.* [41] also demonstrated the importance of O-CO<sub>2</sub> association experimentally in a MW plasma at 60-120 mbar and high temperature (>3500 K), which contributed to 45% of the CO production. Furthermore, an extensive computational study by Berthelot *et al.* [40] gives insight in such a MW plasma under various conditions. On one hand, the reaction of CO<sub>2</sub> with O atoms contributed significantly at lower pressures and temperatures to enhance the CO<sub>2</sub> dissociation. On the other hand, at higher pressures (up to 1 bar) and certainly at higher temperatures (i.e. 3000 K), the recombination reaction of O<sub>2</sub> and CO became equally important. The authors suggested that an equilibrium is reached, which limits the CO<sub>2</sub> conversion at higher temperature and atmospheric pressure. Vargas *et al.* [49] later confirmed the importance of this reaction for the dissociation and recombination mechanisms. Morillo-Candas *et al.* [50] investigated the role of O atoms



experimentally. They argued that adding O<sub>2</sub> to the mixture gives little insight in the role of O atoms, since these mixtures might also change other relevant plasma parameters, such as the CO density. Therefore, they inserted a material with a large specific surface area in a DC glow discharge at reduced pressure, causing O atoms to recombine into O<sub>2</sub> on the surface. The vibrational excitation of both CO<sub>2</sub> and CO increased at these conditions with a low O atom density, proving its role as a vibrational quencher. Interestingly, the CO<sub>2</sub> dissociation remained the same. This implies that vibrational excitation does not contribute to the dissociation on one hand, and that the back reaction mechanism does not involve O atoms on the other hand, confirming the importance of molecular O<sub>2</sub> for recombination, as observed in their previous work. [48] The role of O atoms as a vibrational quencher was observed earlier by Cerner *et al.*, [51] but not with lower O atom concentrations in the conditions of van de Steeg *et al.* [52]

Ultimately, the plasma conditions determine the role of molecular O<sub>2</sub> and O atoms in recombination and dissociation mechanisms. In our conditions, the O atom fraction is possibly too low to enhance CO<sub>2</sub> dissociation, due to recombination of O atoms to molecular O<sub>2</sub>. When adding O<sub>2</sub> molecules to the CO<sub>2</sub> plasma, it is clear that the recombination reactions are dominant and reduce the conversion compared to a pure CO<sub>2</sub> plasma.

On the contrary, the removal of O<sub>2</sub> molecules is clearly more beneficial in our conditions. Le Chatelier's principle seems to hold true, even though a plasma is not necessarily in chemical equilibrium. Removing one of the reaction products will concentrate CO<sub>2</sub> in the mixture and shift the chemical balance to the reaction products, which was also studied in MW plasmas by Wolf *et al.* [53] Furthermore, when O<sub>2</sub> is actively removed, it cannot recombine with CO into CO<sub>2</sub> (reaction R1), which can explain the further rise in CO<sub>2</sub> conversion. The single pass conversion of 8.02 % rises to 27.6 % cumulative conversion, a factor 3.4 higher, while the energy efficiency in the fourth pass is still 18.7 %. It might be challenging to separate O<sub>2</sub> in the reaction mixture itself, as discussed in section 5 below, but again a recirculation procedure can provide a more flexible system to separate the molecules in between the passes.

## 5 Conceptual CO<sub>2</sub> recycling system

Our experiments are a first approach to study the potential of recirculation and allow a great flexibility to investigate the effect of various O<sub>2</sub> concentrations in the input gas mixture. However, our basic setup rather mimics the situation of multiple reactors in series than a recycle flow. More advanced systems in a single reactor are sometimes preferable in an industrial setting. The general scheme in figure 6 gives an overview of such a single reactor recirculation system.

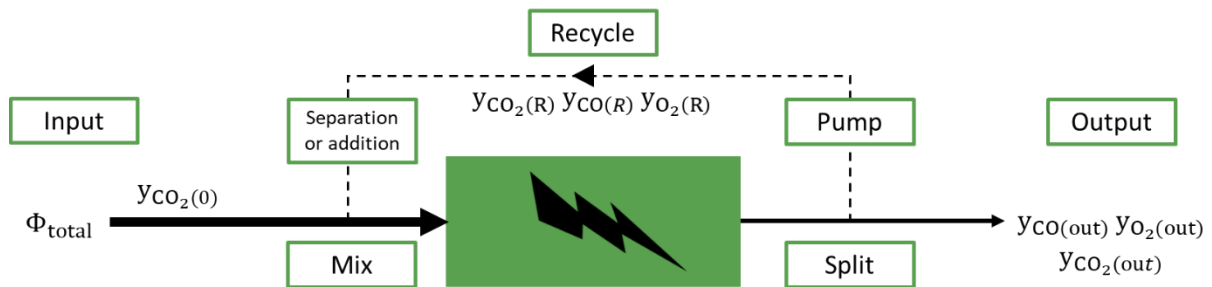


Figure 6 General scheme for a single reactor recirculation system. The input consists of CO<sub>2</sub> which flows through the plasma reactor. The outlet stream can be controlled by a pump to recycle a certain fraction (with or without separation/addition of certain components) back into the input stream.

Such a process requires only one reactor unit, but the integration and optimisation of the recycle flow is less straightforward than for reactors in series (where the number of passes relates directly to the CO<sub>2</sub> conversion and energy efficiency). The recycle ratio must be carefully tuned to obtain a good balance between CO<sub>2</sub> conversion and energy efficiency, which is decisive for product separation. [54] Depending on the process, it might be important to reach the highest CO<sub>2</sub> conversion possible to obtain a more favourable ratio for efficient product separation. On the contrary, the energy efficiency also plays a crucial role: the additional conversion might cost more than adapting the separation process.

Efficient product separation is undoubtedly an essential step for industrial application. [54] It is in fact the dominant cost factor, considering the separation of CO and O<sub>2</sub> is rather energy-intensive, as calculated by van Rooij *et al.*, [55] and the purity of the CO product determines the final selling price. This further highlights the relevance of separation systems in the recycle flow itself. Not only did we observe a significantly higher CO<sub>2</sub> conversion upon removing the oxygen in the recirculation flow, thereby increasing the CO concentration and thus the value of the output stream, this additional separation step could facilitate the final product separation, hence reducing the energy consumption for the same purity.

Traditional separation methods, such as pressure swing adsorption, are certainly applicable for the exhaust of plasma reactors. Carbajo *et al.* [56] investigated the use of commercial zeolite materials for typical CO<sub>2</sub>/CO/O<sub>2</sub> mixtures. Indeed, high purity (> 96 %) and high recovery yields (> 97 %) are demonstrated for both CO and O<sub>2</sub>.

Some novel separation techniques are also developed specifically for plasma reactors. One option to extract O<sub>2</sub> from the plasma, is to insert a hollow fibre membrane in the reactive gas, as investigated by Chen *et al.* [36] They obtained a clear synergistic effect when combining the two: the O<sub>2</sub> permeation flux through the membrane was improved by almost a factor of three in the CO<sub>2</sub> plasma compared to the same hollow fibre without the plasma. Buck *et al.* [57] also observed a higher O<sub>2</sub> permeation flux with the fibre in a plasma compared to heating in an electrical oven. These hollow fibres might be an interesting alternative to conventional non-plasma separation techniques,

although direct contact between the plasma and the fibre might not be possible for all types of plasma reactors (depending on the temperature or arcs that might destroy the fibres). Another option is to combine a plasma with a solid oxide electrolysis cell. Pandiyan *et al.* [58] simulated the typical exhaust of a CO<sub>2</sub> plasma and supplied this to a high temperature electrolyser to enable electrochemical separation of the products. Indeed, oxygen can be separated from the product stream at relatively low temperatures (< 650°C) while CO production is increased via CO<sub>2</sub> electrolysis. Furthermore, the electrode stability is much better compared to the conventional CO<sub>2</sub> electrochemical conversion. In-situ plasma-SOEC reactors show promising results as well, [59, 60] although this is not applicable for all types of plasma reactors depending on the required temperatures, plasma properties, etc.

Another novel approach for product separation is the combination of a plasma with a carbon (charcoal) bed, as recently investigated by Girard-Sahun *et al.* [39] for a gliding arc plasmatron (GAP) reactor. They managed to enhance the CO<sub>2</sub> conversion by almost a factor two, while the CO concentration in the output even increased with a factor three, attributed to carbon gasification. Simultaneously, O<sub>2</sub> was completely removed from the exhaust. Huang J. *et al.* [37] obtained similar improvements with biochar, a more sustainable alternative to charcoal. Thermal plasmas perform even better, as demonstrated by Li Z. *et al.* [38] All these examples with charcoal for separation have the advantage that they require less energy for separation compared to traditional approaches such as pressure swing adsorption. Aside from a system to supply the (bio)charcoal, no extra gas flows or compression are required. Using such a carbon bed in combination with a gas recycling system is very promising indeed.

Other strategies to steer the reaction products include the addition of a hydrogen source (i.e., chemical in-situ oxygen trapping) [61] or plasma catalysis, [62] both growing research fields on their own. In general, it is more interesting to perform plasma catalysis on gas mixtures with a complicated mixture of reaction products, like dry reforming of methane (DRM). [62] These methods could produce value-added chemicals like formic acid and methanol in a single step, thereby skipping the separation step of pure CO<sub>2</sub> splitting altogether. For the APGD reactor studied in this paper, DRM performed well in previous experiments by Wanten *et al.* [16]. The combination with a catalyst could further increase the conversion and steer the product distribution, which will be subject of future research.

Aside from product separation, the presence of impurities in the input gas mixture should be taken into account when targeting industrial application. Depending on the specifics of the industrial application, this could present extra costs if extra separation steps before or after the plasma process are required. On the contrary, it could also provide a route for further optimization. The presence of N<sub>2</sub> in the gas mixture for example could enhance the performance of CO<sub>2</sub> conversion, as demonstrated by Snoeckx *et al.* in a DBD [42] and by Ramakers *et al.* in a gliding arc plasmatron. [63] In the DBD, N<sub>2</sub> enhances the CO<sub>2</sub> conversion for a similar energy efficiency if the N<sub>2</sub> concentration is below 50% N<sub>2</sub>, resulting in a better overall conversion. In the gliding arc plasmatron, the CO<sub>2</sub> conversion increased from 5 to 18 % while forming interesting products like NO and NO<sub>2</sub> as basis for fertilizer (albeit too low for valorisation), without producing the greenhouse gas N<sub>2</sub>O.

Another common impurity is water from a combustion process. The CO<sub>2</sub> conversion drops when adding even a few percent of H<sub>2</sub>O in the mixture in most plasma processes. [4] Yet, the presence of water might be an incentive to perform the promising reaction called bi-reforming of methane (BRM). It was proposed by Olah *et al.* [64] to combine dry and steam reforming, in order to deliver an ideal syngas ratio in a single step, facilitating subsequent processing to methanol or the Fischer-

Tropsch synthesis. The inherent drawbacks of conventional catalytic BRM (slow start-up and catalyst deactivation) are no issue for plasma processes and will be the topic of future research.

It should be noted that our approach is still far from real industrial application, as it does not yet account for separation (costs), the effect of impurities and upscaling. However, we do believe that our results can already provide more insight for future industrial application of advanced plasma processes. Although we did not perform a techno-economic analysis, our simplified procedure reveals the opportunities of plasma in engineering and possible industrialisation. Further improvements in e.g. reactor design, heat recovery and plasma catalysis can strengthen the role of plasma technology as a valuable part of the CCU landscape.

## 6 Conclusion

In this work, we developed a basic procedure to study a plasma reactor (i.e. an APGD) in series as a first approximation of a recycle flow. The CO<sub>2</sub> conversion rises considerably with five passes (from 8% to 24 %) for a limited drop in energy efficiency (from 24 % to 14 % in pass five). Around 8-10 passes, the conversion saturates due to the competition between dissociation and recombination reactions, at a value of 29 % which is 3.4 times higher than the single pass. The energy efficiency decreases with each pass, since the same plasma power is applied for a smaller extra conversion per pass. Still, our procedure clearly outperforms the single pass conversion for reasonable energy efficiencies. It provides an alternative to increasing the energy input in the existing reactors, while maintaining the advantages of a non-equilibrium plasma at low current to improve the performance.

Thanks to the flexibility of our method, we were able to explore the reactivity of O<sub>2</sub> molecules: on one hand, O atoms can enhance the CO<sub>2</sub> dissociation (by the reaction:  $O + CO_2 \rightarrow CO + O_2$ ), but on the other hand, O<sub>2</sub> molecules can recombine with CO and reduce the CO<sub>2</sub> conversion (opposite reaction). At our conditions, adding oxygen to the mixture has a detrimental effect on the CO<sub>2</sub> conversion, indicating it reacts as O<sub>2</sub> and not as O atoms. Instead removing the O<sub>2</sub> in between each pass has a clear beneficial effect, since removing a reaction product prevents recombination reactions and shifts the chemical balance to facilitate dissociation. The conversion per pass stays nearly constant, resulting in a much better energy efficiency per pass (nearly 20%) than the other two methods. The cumulative conversion of the O<sub>2</sub> removal method is nearly 28 % after four passes, and thus, more than three times higher than the 8 % of a single pass. Obviously, this comes at a somewhat higher energy cost, because a higher total power is applied in the recirculation method. However, while the single pass method exhibits an energy cost of 7380 kWh/ton, the O<sub>2</sub> removal method requires only a slightly higher energy cost of 8760 kWh/ton. Although we did not account for the cost of separation yet, these results still demonstrate the great potential of this method.

In conclusion, a recycle flow in plasma reactors is highly promising, especially when removing the O<sub>2</sub> with separation strategies such as pressure swing adsorption, hollow fibre membranes, solid oxide electrolysis, or the combination with a carbon bed to extract the O<sub>2</sub>. This work reveals interesting opportunities for the industrialisation of plasma processes and its potential to be a valuable part of all CCU technologies that are necessary for the transition to a more sustainable world.

## 7 Acknowledgments

We acknowledge financial support from the Fund for Scientific Research (FWO) Flanders (Grant ID 110221N), the Flemish Agency for Innovation and Entrepreneurship (VLAIO) (Grant ID HBC.2021.0251), and the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme (grant agreement No 810182 - SCOPE ERC Synergy project). We also thank L. Hollevoet, K. Rouwenhorst, F. Girard-Sahun, B. Wanten and I. Tsonev for the interesting discussions and practical help with the experiments.

## 8 References

- [1] V. Masson-Delmotte, P. Zhai, A. Pirani, S. L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M. I. Gomis, M. Huang, K. Leitzell, E. Lonnoy, J. B. R. Matthews, T. K. Maycock, T. Waterfield, O. Yelekçi, R. Yu, B. Zhou, IPCC, 2021: Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change, 2021.
- [2] R.S. Norhasyima, T.M.I. Mahlia, Advances in CO<sub>2</sub> utilization technology: A patent landscape review, *Journal of Co<sub>2</sub> Utilization* 26 (2018) 323-335. <https://doi.org/10.1016/j.jcou.2018.05.022>.
- [3] M. Braungart, W. McDonough, *Cradle to cradle, De la cuna a la* (2013).
- [4] R. Snoeckx, A. Bogaerts, Plasma technology - a novel solution for CO<sub>2</sub> conversion?, *Chem Soc Rev* 46(19) (2017) 5805-5863. <https://doi.org/10.1039/c6cs00066e>.
- [5] A. Fridman, *Plasma chemistry*, Cambridge university press 2008.
- [6] R. Aerts, W. Somers, A. Bogaerts, Carbon dioxide splitting in a dielectric barrier discharge plasma: a combined experimental and computational study, *ChemSusChem* 8(4) (2015) 702-716. <https://doi.org/10.1002/cssc.201402818>.
- [7] Y. Uytendhouwen, S. Van Alphen, I. Michielsen, V. Meynen, P. Cool, A. Bogaerts, A packed-bed DBD micro plasma reactor for CO<sub>2</sub> dissociation: Does size matter?, *Chemical Engineering Journal* 348 (2018) 557-568. <https://doi.org/10.1016/j.cej.2018.04.210>.
- [8] W. Bongers, H. Bouwmeester, B. Wolf, F. Peeters, S. Welzel, D. van den Bekerom, N. den Harder, A. Goede, M. Graswinckel, P.W. Groen, Plasma-driven dissociation of CO<sub>2</sub> for fuel synthesis, *Plasma processes and polymers* 14(6) (2017) 1600126. <https://doi.org/10.1002/ppap.201600126>.
- [9] M. Ramakers, G. Trenchev, S. Heijkers, W. Wang, A. Bogaerts, Gliding Arc Plasmatron: Providing an Alternative Method for Carbon Dioxide Conversion, *ChemSusChem* 10(12) (2017) 2642-2652. <https://doi.org/10.1002/cssc.201700589>.
- [10] G. Trenchev, S. Kolev, W. Wang, M. Ramakers, A. Bogaerts, CO<sub>2</sub> Conversion in a Gliding Arc Plasmatron: Multidimensional Modeling for Improved Efficiency, *The Journal of Physical Chemistry C* 121(44) (2017) 24470-24479. <https://doi.org/10.1021/acs.jpcc.7b08511>.
- [11] P. Bruggeman, R. Brandenburg, Atmospheric pressure discharge filaments and microplasmas: physics, chemistry and diagnostics, *Journal of Physics D: Applied Physics* 46(46) (2013). <https://doi.org/10.1088/0022-3727/46/46/464001>.
- [12] W.S. Boyle, F.E. Haworth, Glow-to-Arc Transition, *Physical Review* 101(3) (1956) 935-938. <https://doi.org/10.1103/PhysRev.101.935>.
- [13] M. Cernak, E. Van Veldhuizen, I. Morva, W. Rutgers, Effect of cathode surface properties on glow-to-arc transition in a short positive corona gap in ambient air, *Journal of Physics D: Applied Physics* 28(6) (1995) 1126. <https://doi.org/10.1088/0022-3727/28/6/015>.
- [14] D. Shaw, A. West, J. Bredin, E. Wagenaars, Mechanisms behind surface modification of polypropylene film using an atmospheric-pressure plasma jet, *Plasma Sources Science and Technology* 25(6) (2016) 065018. <https://doi.org/10.1088/0963-0252/25/6/065018>.
- [15] J.-Y. Wang, G.-G. Xia, A. Huang, S.L. Suib, Y. Hayashi, H. Matsumoto, CO<sub>2</sub> decomposition using glow discharge plasmas, *Journal of catalysis* 185(1) (1999) 152-159. <https://doi.org/10.1006/jcat.1999.2499>.
- [16] B. Wanten, S. Maerivoet, C. Vantomme, J. Slaets, G. Trenchev, A. Bogaerts, Dry reforming of methane in an atmospheric pressure glow discharge: Confining the plasma to expand the performance, *Journal of CO<sub>2</sub> Utilization* 56 (2022) 101869. <https://doi.org/10.1016/j.jcou.2021.101869>.
- [17] G. Trenchev, A. Nikiforov, W. Wang, S. Kolev, A. Bogaerts, Atmospheric pressure glow discharge for CO<sub>2</sub> conversion: Model-based exploration of the optimum reactor configuration, *Chemical Engineering Journal* 362 (2019) 830-841. <https://doi.org/10.1016/j.cej.2019.01.091>.
- [18] G. Trenchev, A. Bogaerts, Dual-vortex plasmatron: A novel plasma source for CO<sub>2</sub> conversion, *Journal of CO<sub>2</sub> Utilization* 39 (2020). <https://doi.org/10.1016/j.jcou.2020.03.002>.
- [19] M.E. Davis, R.J. Davis, *Fundamentals of chemical reaction engineering*, Courier Corporation 2012.

- [20] M. Appl, Ammonia, 2. Production Processes, Ullmann's Encyclopedia of Industrial Chemistry. [https://doi.org/10.1002/14356007.o02\\_o11](https://doi.org/10.1002/14356007.o02_o11).
- [21] V. Dieterich, A. Buttler, A. Hanel, H. Spliethoff, S. Fendt, Power-to-liquid via synthesis of methanol, DME or Fischer–Tropsch-fuels: a review, *Energy & Environmental Science* 13(10) (2020) 3207-3252. <https://doi.org/10.1039/d0ee01187h>.
- [22] R. Rostami, G. Moussavi, S. Darbari, A. Jonidi Jafari, Enhanced removal of benzene in non-thermal plasma with ozonation, flow recycling, and flow recirculation, *Plasma Science and Technology* 21(9) (2019) 095501. <https://doi.org/10.1088/2058-6272/ab2198>.
- [23] I.A. Martorell, W.D. Partlow, R.M. Young, J.J. Schreurs, H.E. Saunders, Gas recycling and flow control for cost reduction of diamond films deposited by DC arc-jet, *Diamond and related materials* 8(1) (1999) 29-36. [https://doi.org/10.1016/S0925-9635\(98\)00298-2](https://doi.org/10.1016/S0925-9635(98)00298-2).
- [24] T. Harlacher, T. Melin, M. Wessling, Techno-economic analysis of membrane-based argon recovery in a silicon carbide process, *Industrial & Engineering Chemistry Research* 52(31) (2013) 10460-10466. <https://doi.org/10.1021/ie303330b>.
- [25] J.H. Bang, C.A. Santos, Y.M. Jo, Energy efficient treatment of indoor volatile organic compounds using a serial dielectric barrier discharge reactor, *Process Safety and Environmental Protection* 153 (2021) 29-36. <https://doi.org/10.1016/j.psep.2021.07.009>.
- [26] R.G. Tonkyn, S.E. Barlow, J.W. Hoard, Reduction of NO<sub>x</sub> in synthetic diesel exhaust via two-step plasma-catalysis treatment, *Applied Catalysis B: Environmental* 40(3) (2003) 207-217. [https://doi.org/10.1016/S0926-3373\(02\)00150-9](https://doi.org/10.1016/S0926-3373(02)00150-9).
- [27] Y. Li, Z. Fan, J. Shi, Z. Liu, J. Zhou, W. Shangguan, Removal of volatile organic compounds (VOCs) at room temperature using dielectric barrier discharge and plasma-catalysis, *Plasma Chemistry and Plasma Processing* 34(4) (2014) 801-810. <https://doi.org/10.1007/s11090-014-9535-3>.
- [28] B. Dojčinović, B.M. Obradović, M.M. Kuraica, M. Pergal, S.D. Dolic, D.R. Indic, T. Tosti, D. Manojlović, Application of non-thermal plasma reactor for degradation and detoxification of high concentrations of dye Reactive Black 5 in water, *Journal of the Serbian Chemical Society* 81(7) (2016) 829-845. <https://doi.org/10.2298/JSC160105030D>.
- [29] B. Wang, H. Guan, Highly efficient conversion of methane to olefins via a recycle-plasma-catalyst reactor, *Catalysis Letters* 146(10) (2016) 2193-2199. <https://doi.org/10.1007/s10562-016-1846-y>.
- [30] J. An, H.J. Kim, Y.N. Chun, Development of partial oxidation reformer in gliding arc plasma-matrix burner, *Renewable Energy* 163 (2021) 1711-1717. <https://doi.org/10.1016/j.renene.2020.10.077>.
- [31] T. Sreethawong, P. Thakonpatthanakun, S. Chavadej, Partial oxidation of methane with air for synthesis gas production in a multistage gliding arc discharge system, *International Journal of Hydrogen Energy* 32(8) (2007) 1067-1079. <https://doi.org/10.1016/j.ijhydene.2006.07.013>.
- [32] S. Li, F. Gallucci, CO<sub>2</sub> capture and activation with a plasma-sorbent system, *Chemical Engineering Journal* 430 (2022) 132979. <https://doi.org/10.1016/j.cej.2021.132979>.
- [33] I. Semiokhin, Y.P. Andreev, G. Panchenkov, Dissociation of carbon dioxide circulating in a silent electric Discharge, *Russ. J. Phys. Chem* 38(8) (1964) 1126.
- [34] I. Semiokhin, Y.P. Andreev, Formation of ozone in synthesis and dissociation of carbon dioxide in silent discharge, *Russ. J. Phys. Chem* 40(9) (1966) 1161.
- [35] V. Vermeiren, A. Bogaerts, Plasma-Based CO<sub>2</sub> Conversion: To Quench or Not to Quench?, *The Journal of Physical Chemistry C* 124(34) (2020) 18401-18415. <https://doi.org/10.1021/acs.jpcc.0c04257>.
- [36] G. Chen, F. Buck, I. Kistner, M. Widenmeyer, T. Schiestel, A. Schulz, M. Walker, A. Weidenkaff, A novel plasma-assisted hollow fiber membrane concept for efficiently separating oxygen from CO in a CO<sub>2</sub> plasma, *Chemical Engineering Journal* 392 (2020). <https://doi.org/10.1016/j.cej.2019.123699>.
- [37] J. Huang, H. Zhang, Q. Tan, L. Li, R. Xu, Z. Xu, X. Li, Enhanced conversion of CO<sub>2</sub> into O<sub>2</sub>-free fuel gas via the Boudouard reaction with biochar in an atmospheric plasmatron, *Journal of CO<sub>2</sub> Utilization* 45 (2021). <https://doi.org/10.1016/j.jcou.2020.101429>.
- [38] Z. Li, T. Yang, S. Yuan, Y. Yin, E.J. Devid, Q. Huang, D. Auerbach, A.W. Kleyn, Boudouard reaction driven by thermal plasma for efficient CO<sub>2</sub> conversion and energy storage, *Journal of Energy Chemistry* 45 (2020) 128-134. <https://doi.org/10.1016/j.jechem.2019.10.007>.

- [39] F. Girard-Sahun, O. Biondo, G. Trenchev, G.J. van Rooij, A. Bogaerts, Carbon bed post-plasma to enhance the CO<sub>2</sub> conversion and remove O<sub>2</sub> from the product stream (submitted), *Chemical Engineering Journal* (2022). <https://doi.org/10.1016/j.cej.2022.136268>.
- [40] A. Berthelot, A. Bogaerts, Modeling of CO<sub>2</sub> Splitting in a Microwave Plasma: How to Improve the Conversion and Energy Efficiency, *The Journal of Physical Chemistry C* 121(15) (2017) 8236-8251. <https://doi.org/10.1021/acs.jpcc.6b12840>.
- [41] A. van de Steeg, P. Viegas, A. Silva, T. Butterworth, A. van Bavel, J. Smits, P. Diomede, M. van de Sanden, G. van Rooij, Redefining the Microwave Plasma-Mediated CO<sub>2</sub> Reduction Efficiency Limit: The Role of O–CO<sub>2</sub> Association, *ACS Energy Letters* 6(8) (2021) 2876-2881. <https://doi.org/10.1021/acsenergylett.1c01206>.
- [42] R. Snoeckx, S. Heijkers, K. Van Wesenbeeck, S. Lenaerts, A. Bogaerts, CO<sub>2</sub> conversion in a dielectric barrier discharge plasma: N<sub>2</sub> in the mix as a helping hand or problematic impurity?, *Energy & Environmental Science* 9(3) (2016) 999-1011. <https://doi.org/10.1039/c5ee03304g>.
- [43] N. Pinhão, A. Moura, J.B. Branco, J. Neves, Influence of gas expansion on process parameters in non-thermal plasma plug-flow reactors: A study applied to dry reforming of methane, *International Journal of Hydrogen Energy* 41(22) (2016) 9245-9255. <https://doi.org/10.1016/j.ijhydene.2016.04.148>.
- [44] R. Li, Q. Tang, S. Yin, T. Sato, Plasma catalysis for CO<sub>2</sub> decomposition by using different dielectric materials, *Fuel Processing Technology* 87(7) (2006) 617-622. <https://doi.org/10.1016/j.fuproc.2006.01.007>.
- [45] K. Zhang, A.P. Harvey, CO<sub>2</sub> decomposition to CO in the presence of up to 50% O<sub>2</sub> using a non-thermal plasma at atmospheric temperature and pressure, *Chemical Engineering Journal* 405 (2021). <https://doi.org/10.1016/j.cej.2020.126625>.
- [46] P. Navascués, J. Cotrino, A.R. González-Elipe, A. Gómez-Ramírez, Plasma assisted CO<sub>2</sub> dissociation in pure and gas mixture streams with a ferroelectric packed-bed reactor in ambient conditions, *Chemical Engineering Journal* 430 (2022). <https://doi.org/10.1016/j.cej.2021.133066>.
- [47] Y. Uytendhouwen, K.M. Bal, I. Michielsen, E.C. Neyts, V. Meynen, P. Cool, A. Bogaerts, How process parameters and packing materials tune chemical equilibrium and kinetics in plasma-based CO<sub>2</sub> conversion, *Chemical Engineering Journal* 372 (2019) 1253-1264. <https://doi.org/10.1016/j.cej.2019.05.008>.
- [48] A.S. Morillo-Candas, V. Guerra, O. Guaitella, Time Evolution of the Dissociation Fraction in rf CO<sub>2</sub> Plasmas: Impact and Nature of Back-Reaction Mechanisms, *The Journal of Physical Chemistry C* 124(32) (2020) 17459-17475. <https://doi.org/10.1021/acs.jpcc.0c03354>.
- [49] J. Vargas, B. Lopez, M. Lino da Silva, Heavy Particle Impact Vibrational Excitation and Dissociation Processes in CO<sub>2</sub>, *J Phys Chem A* 125(2) (2021) 493-512. <https://doi.org/10.1021/acs.jpca.0c05677>.
- [50] A.S. Morillo-Candas, B.L.M. Klarenaar, C. Amoedo, V. Guerra, O. Guaitella, Effect of oxygen atoms on the vibrational kinetics of CO<sub>2</sub> and CO revealed by the use of a large surface area material, *Journal of Physics D: Applied Physics* 54(9) (2020) 095208. <https://doi.org/10.1088/1361-6463/abc992>.
- [51] R.E. Center, Vibrational relaxation of CO<sub>2</sub> by O atoms, *The Journal of Chemical Physics* 59(7) (1973) 3523-3527. <https://doi.org/10.1063/1.1680514>.
- [52] A.W. van de Steeg, T. Butterworth, D.C.M. van den Bekerom, A.F. Silva, M.C.M. van de Sanden, G.J. van Rooij, Plasma activation of N<sub>2</sub>, CH<sub>4</sub> and CO<sub>2</sub>: an assessment of the vibrational non-equilibrium time window, *Plasma Sources Science and Technology* 29(11) (2020) 115001. <https://doi.org/10.1088/1361-6595/abb4e4>.
- [53] A.J. Wolf, F.J.J. Peeters, P.W.C. Groen, W.A. Bongers, M.C.M. van de Sanden, CO<sub>2</sub> Conversion in Nonuniform Discharges: Disentangling Dissociation and Recombination Mechanisms, *The Journal of Physical Chemistry C* 124(31) (2020) 16806-16819. <https://doi.org/10.1021/acs.jpcc.0c03637>.
- [54] M. Van Dael, Market study report CCU (2019/SCT/R/1876), VITO, 2018.
- [55] G.J. van Rooij, H.N. Akse, W.A. Bongers, M.C.M. van de Sanden, Plasma for electrification of chemical industry: a case study on CO<sub>2</sub> reduction, *Plasma Physics and Controlled Fusion* 60(1) (2018). <https://doi.org/10.1088/1361-6587/aa8f7d>.



- [56] J. Perez-Carbajo, I. Matito-Martos, S.R.G. Balestra, M.N. Tsampas, M.C.M. van de Sanden, J.A. Delgado, V.I. Águeda, P.J. Merklings, S. Calero, Zeolites for CO<sub>2</sub>–CO–O<sub>2</sub> Separation to Obtain CO<sub>2</sub>-Neutral Fuels, *ACS Applied Materials & Interfaces* 10(24) (2018) 20512-20520. <https://doi.org/10.1021/acsami.8b04507>.
- [57] F. Buck, K. Wieggers, A. Schulz, T. Schiestel, Effect of plasma atmosphere on the oxygen transport of mixed ionic and electronic conducting hollow fiber membranes, *Journal of Industrial and Engineering Chemistry* 104 (2021) 1-7. <https://doi.org/10.1016/j.jiec.2021.08.044>.
- [58] A. Pandiyan, V. Kyriakou, D. Neagu, S. Welzel, A. Goede, M.C.M. van de Sanden, M.N. Tsampas, CO<sub>2</sub> conversion via coupled plasma-electrolysis process, *Journal of CO<sub>2</sub> Utilization* 57 (2022) 101904. <https://doi.org/10.1016/j.jcou.2022.101904>.
- [59] X. Chen, A. Shaur, M. Grofulovic, B. Wolf, W. Bongers, F. Peeters, G. Zhang, H. Bouwmeester, R. van de Sanden, Plasma-Enhanced High Temperature Solid-Oxide Electrolysis Cells: The Search for Synergy, *ECS Meeting Abstracts MA2021-01(22)* (2021) 880-880. <https://doi.org/10.1149/ma2021-0122880mtgabs>.
- [60] S. Mori, L.L. Tun, Synergistic CO<sub>2</sub> conversion by hybridization of dielectric barrier discharge and solid oxide electrolyser cell, *Plasma Processes and Polymers* 14(6) (2017) 1600153. <https://doi.org/10.1002/ppap.201600153>.
- [61] R. Aerts, R. Snoeckx, A. Bogaerts, In-Situ Chemical Trapping of Oxygen in the Splitting of Carbon Dioxide by Plasma, *Plasma Processes and Polymers* 11(10) (2014) 985-992. <https://doi.org/10.1002/ppap.201400091>.
- [62] A. Bogaerts, X. Tu, J.C. Whitehead, G. Centi, L. Lefferts, O. Guaitella, F. Azzolina-Jury, H.-H. Kim, A.B. Murphy, W.F. Schneider, T. Nozaki, J.C. Hicks, A. Rousseau, F. Thevenet, A. Khacef, M. Carreon, The 2020 plasma catalysis roadmap, *Journal of Physics D: Applied Physics* 53(44) (2020). <https://doi.org/10.1088/1361-6463/ab9048>.
- [63] M. Ramakers, S. Heijkers, T. Tytgat, S. Lenaerts, A. Bogaerts, Combining CO<sub>2</sub> conversion and N<sub>2</sub> fixation in a gliding arc plasmatron, *Journal of CO<sub>2</sub> Utilization* 33 (2019) 121-130. <https://doi.org/10.1016/j.jcou.2019.05.015>.
- [64] G.A. Olah, A. Goepfert, M. Czaun, T. Mathew, R.B. May, G.K.S. Prakash, Single Step Bi-reforming and Oxidative Bi-reforming of Methane (Natural Gas) with Steam and Carbon Dioxide to Metgas (CO-2H<sub>2</sub>) for Methanol Synthesis: Self-Sufficient Effective and Exclusive Oxygenation of Methane to Methanol with Oxygen, *Journal of the American Chemical Society* 137(27) (2015) 8720-8729. <https://doi.org/10.1021/jacs.5b02029>.